American Standard

BARRIER FREE

HIGH HAMILTON™ ELONGATED SPACE-SAVING ONE-PIECE TOILET

VITREOUS CHINA

HIGH HAMILTON™ ELONGATED SPACE-SAVING ONE-PIECE TOILET

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- One-piece toilet features a higher (427mm 16-13/16") bowl for added comfort
- Elongated siphon action bowl and tank with unique space-saving feature
- Fits into the same space as a conventional round front toilet
- Color-matched trip lever
- Internal trapway area fully glazed
- Includes color-matched Rise and Shine™ plastic seat and cover (#5324.019) with easy-to-clean lift-off hinge system
- 2 bolt caps
- 100% factory flush tested

❑ **2096.016**

❑ **2096.333**

- Right-hand trip lever

Nominal Dimensions:
692 x 457 x 699mm
(27-1/4" x 18" x 27-1/2")

Fixture only, supply by others

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions

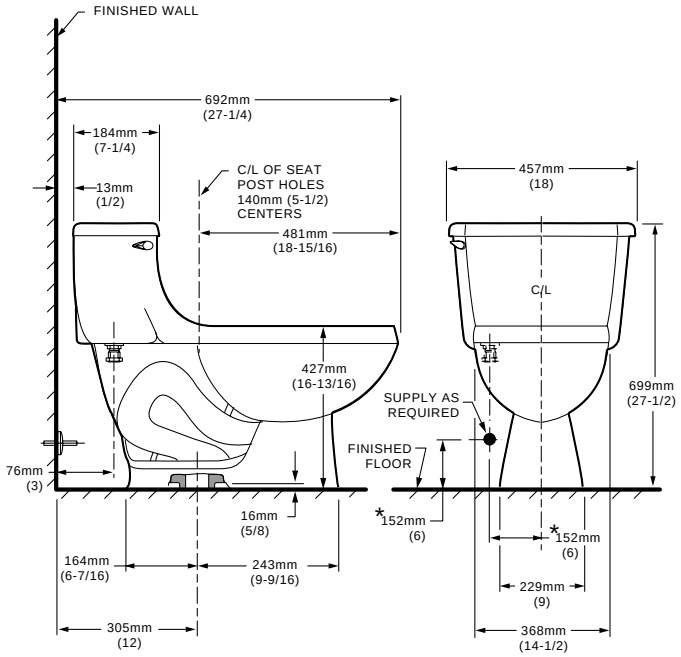

NOTE: Roughing-in information shown on reverse side of page

To Be Specified

❑ Color:

❑ Supply with stop:

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.

● When installed, top of seat meets minimum requirement of 432 to 483mm (17" to 19") from the finished floor.

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2004 American Standard Inc.

HIGH HAMILTON™ ELONGATED SPACE-SAVING ONE-PIECE TOILET

VITREOUS CHINA

2096.333 RIGHT HAND HOLE TRIP LEVER

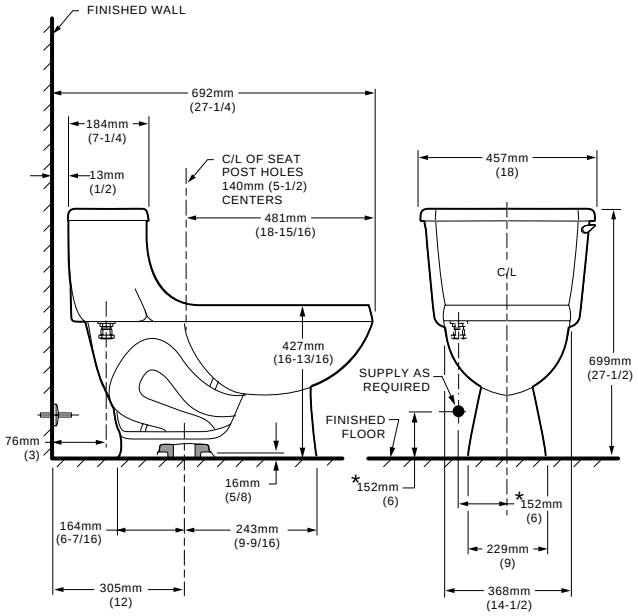

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.

● When installed, top of seat meets minimum requirement of 432 to 483mm (17" to 19") from the finished floor.

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2004 American Standard Inc.